

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : G02B 5/04, F21V 5/02</p>	<p>A1</p>	<p>(11) International Publication Number: WO 99/42861 (43) International Publication Date: 26 August 1999 (26.08.99)</p>
<p>(21) International Application Number: PCT/US99/01305 (22) International Filing Date: 22 January 1999 (22.01.99) (30) Priority Data: 09/025,183 18 February 1998 (18.02.98) US (71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (72) Inventors: CAMPBELL, Alan, B.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). COBB, Sandford, Jr.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). KRETZMAN, Wade, D.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). NIEZGOCKI, Marvin, J.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). HOOPMAN, Timothy, L.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). (74) Agents: BUCKINGHAM, Stephen, W. et al.; Minnesota Mining and Manufacturing Company, Office of Intellectual Property Counsel, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(54) Title: OPTICAL FILM</p> <div data-bbox="344 1186 1274 1690"></div> <p>(57) Abstract</p> <p>An optical film having structures that vary in height along their length where the variations have a nominal period of less than forty times the nominal height of the structures is taught. In some embodiments of the invention the variation is random.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Optical Film

Background of the Invention

5 The use of a variety of structured surface films in backlit displays is well known. For example, U.S. Patent No. 5,161,041 ("Abileah") describes a prismatic film to enhance the apparent brightness of a backlit liquid crystal display. The Abileah patent further describes the use of two such structured surface films, preferably with the structures oriented perpendicular to one another, to further enhance the apparent brightness of such a display. In general, the increase in on-axis brightness produced by such a structured surface film is known as the "gain" of such a film. The on-axis gain of a film refers to the ratio of the intensity of light as measured in a direction perpendicular to the backlight with the film to the intensity observed in a direction perpendicular to the same backlight without the film.

10 Other structured surface films may be used to redirect light traveling in one direction to a more desired output angle. United States patents 4,984,144 ("Cobb et al.") and 5,190,370 ("Miller et al."), the teachings of which are incorporated herein by reference, teach light fixtures utilizing such films. These light fixtures could be used as backlights for displays.

15 One problem with using films such as those described above in a display that is intended for close viewing, such as a computer display, is that the cosmetic requirements are very high. This is because, when such displays are studied very closely or used for an extended period of time, even very small defects may be visible and annoying. Elimination of such defects can be very costly both in inspection time and discarded materials.

20 There are several approaches to the problems created by the visibility of such small defects and consequent low manufacturing yield. One solution is to simply accept the relatively high rejection rate of common manufacturing processes. A second solution is to provide more efficient, and expensive, clean rooms, use only ultra-clean materials, use extraordinary care in the preparation of manufacturing tooling, and employ extremely rigid quality control procedures. While this will reduce the waste, it can introduce even more expense in order to produce higher yield.

25

30

Another solution is to provide the film with a diffuser. This may be a matte finish on the smooth side, the structured side, or both, of the film or a bulk diffuser provided in the film. Such diffusers will hide many of the defects, making them invisible to the user. This will significantly improve manufacturing yield, while only adding a small increase in cost to the manufactured part. The disadvantage of this approach is that the diffuser will scatter the light and thus decrease on-axis gain. Therefore, a diffuser will increase yield but at the expense of some performance.

Another problem that has been observed in prior art systems utilizing two sheets of brightness enhancing film, as described above, is known as "wet-out." Wet-out occurs as a result of optical coupling between the prisms of one sheet and the smooth surface of the other. The optical coupling prevents total internal reflection from occurring along these peaks, thus destroying the brightness enhancing effect desired. The result is a mottled and varying appearance to the backlight.

Summary of the Invention

According to the present invention an optical film has structures that vary in height along their length where the variations have a nominal period of less than forty times the nominal height of the structures. In some embodiments of the invention the variation is random.

20

Brief Description of the Drawings

- FIGURE 1 shows a display utilizing a brightness enhancing film;
FIGURE 2 shows a brightness enhancing film;
25 FIGURE 3 is a graph showing the operation of a brightness enhancing film;
FIGURE 4 shows a brightness enhancing film of the prior art;
FIGURE 5 shows an optical film according to the invention;
FIGURE 6 is a photo-micrograph of an optical film according to the invention;
FIGURE 7 is a photo-micrograph of an optical film according to the invention;
30 FIGURE 8 shows a second optical film according to the invention;

FIGURE 9 shows a fast tool servo actuator for use in manufacturing a film according to the invention;

FIGURE 10 shows a third film according to the invention; and

FIGURE 11 shows a light fixture utilizing a light redirecting film according to the invention.

Detailed Description

Figure 1 illustrates a first embodiment of a display, 10, according to one aspect of the invention. Display 10 includes a case 12. Display 10 includes an area source of light 16 and a structured surface material 18. Generally, area light source 16 is a thin, solid light guide that receives light through one or more of its narrow edges from one or more line light sources, such as fluorescent tubes, although other area light sources such as electroluminescent materials may be used. Typically, if a solid light guide is used, it will be of an acrylic material and conduct light by total internal reflection. Generally the light guide will have diffusely reflective dots on the back to extract light in the direction of structured surface material 18. The operation of such area light sources is well known in the art. A reflective material, 19, is preferably positioned behind area light source 16. Reflective material 19 is preferably a diffuse reflector.

Structured surface material 18 has a smooth surface 20 and a structured surface 22. Smooth surface 20 lies toward the back of display 10 and structured surface 22 lies toward the front. Structured surface material 18 and area light source 16 are separated by an optical diffuser 24. Structured surface 22 has a light exit wedge associated therewith and smooth surface 24 has a light entry wedge associated therewith, where the light exit wedge is narrower than the light entry wedge. Although surface 24 is described here as smooth, it could also have structures thereon. Structured surface material 18 and its operation in the invention will be described in greater detail in conjunction with Figures 2 and 3.

Display 10 further includes a light gating device 26. Typically light gating device 26 is a liquid crystal display, although other light gating devices may be used. As is well known in the art, a liquid crystal display may be made transparent or opaque, in the case of a monochrome display, or transparent or a variety of colors in the case of a color display by the proper

application of electrical signals. This will form images that will be visible when area light source 16 is illuminated. Display 10 further includes a transparent cover sheet 28.

Figure 2 is an enlargement of structured surface material 18 of Figure 1. As described previously, structured surface material 18 has a smooth side 20 and a structured side 22. Structured side 22, in the preferred embodiment, includes a plurality of triangular prisms. In the preferred embodiment, such prisms are right isosceles prisms, although prisms having other peak angles may be used. Prisms with peak angles in the range of 70 degrees to 110 degrees have been shown to work with varying degrees of effectiveness with the invention. Furthermore the peaks, valleys or both of the prism-structures may be curved in cross section. Although this will decrease the gain provided by the structures, it will provide other effects that are sometimes desirable

Structured surface material 18 may be of any transparent material having an index of refraction greater than that of air, but, in general, the materials with higher indices of refraction will produce better results. Polycarbonate, which has an index of refraction of 1.586, has proven to work very effectively. For purposes of description of a preferred embodiment of the invention, the prisms on structured surface 22 will be assumed to have included angles of 90 degrees and structured surface material 18 will be assumed to be of polycarbonate.

Figure 3 illustrates the operation of structured surface material 18. Figure 3 is a graph having two axes 26 and 28. These axes represent the angle that a light ray makes to a normal to smooth surface 20. Specifically, axis 26 represents the angle that the light ray makes when the direction of the light ray is projected into a plane parallel to the linear extent of the structures on structured surface 22. Similarly axis 28 represents the angle that the light ray makes to a normal to smooth surface 20 when the direction of the light ray is projected into a plane perpendicular to the linear extent of the structures on structured surface 22. Thus a light ray striking perpendicular to smooth surface 20 would be represented by the origin, labeled 0 degrees, of the graph of Figure 3. As may be seen, Figure 3 is divided into regions 30, 32, and 34. Light rays striking at angles that fall within region 30 will enter structured surface material 18 but be totally internally reflected by structured surface 22 so that they pass through smooth surface 20 a second time and reenter diffuser 24. Light rays striking smooth surface 20 at an angle such that they fall in region 32 or 34 will be transmitted but refracted to a different angle with respect to the normal. As may be seen from Figure 3, which represents the performance of polycarbonate,

any light ray striking smooth surface 20 at an angle of less than 9.4 degrees to the normal, will be reflected.

Returning to Figure 2, four exemplary light rays are shown. The first, light ray 36, approaches smooth surface 20 at a grazing angle, i.e., an angle to the normal approaching 90 degrees. If light ray 36 makes an angle of 89.9 degrees to the normal to surface 20 when it strikes structured surface material 18, it will be refracted such that it makes an angle of 39.1 degrees to the normal as it travels through structured surface material 18. Upon reaching structured surface 22, it will be refracted again. Because of the structures on structured surface 22, it will be refracted so that again it will make a smaller angle to the normal to structured surface 20. In the example it will make an angle of 35.6 degrees.

Light ray 38 approaches smooth surface 20 at an angle much closer to the normal to smooth surface 20. It also is refracted as it passes through smooth surface 20, but to a lesser extent. If light ray 38 approaches smooth surface 20 at an angle of 10 degrees to the normal to smooth surface 20, it will emerge from structured surface 22 at an angle of 37.7 degrees to the normal to smooth surface 20 but on the opposite side of that normal.

Light ray 40 approaches at an angle even closer to the normal to smooth surface 20 than did light ray 38 and is totally internally reflected twice by structured surface 22 and returned to the interior of display 10.

Finally, light ray 42 approaches smooth surface 20 at an angle similar to that of light ray 38, but in a location such that it is totally internally reflected by one side of a prism on structured surface 22 but not by the second side. As a result it emerges at a large angle to the normal to smooth surface 20. Because such a reflection only occurs to a light ray that is traveling in a direction that forms a high incidence angle to the side it strikes, the prisms provide a very small cross section to such rays. In addition many of those rays will reenter the next prism and be returned into display 10.

A fifth class of light ray is not shown in Figure 2. This is the set of light rays that are reflected by smooth surface 20 and do not enter structured surface material 18. Such light rays simply join the others that are reflected back into display 10.

As may be seen from this discussion, light that, absent structured surface material 18, would have emerged from the display at a high angle to the axis of the display, where the axis of the display is taken to be the normal to smooth surface 20, is redirected into a direction closer to

that axis. A small amount of light will be directed out at a large angle to the axis. Thus, we may say that light that enters structured surface material 18 through smooth surface 20 with an angle of incidence greater than a predetermined angle is directed into an output wedge that is narrower than the input wedge and the majority of the light that enters structured surface material 18 through smooth surface 20 at an angle of incidence of less than that predetermined angle will be reflected back into display 10.

The light that is reflected back into display 10 will strike reflector 19 and diffuser 24. This light will be reflected and diffused and then will travel back to structured surface material 18, in general at a different angle than it made the first time. The process is then repeated so that more of the light is redirected into the smaller wedge. Generally, a brightness enhancing film such as structured surface material 18 will be capable of reflecting light striking it in a first predetermined group of angles and passing, but refracting, light striking it in a second predetermined group of angles wherein the angles in the second group of angles are greater than those in the first group of angles and wherein the light in the second group of angles is refracted into an output wedge that is narrower than its input wedge. Furthermore, the system must be capable of recycling the light that is reflected by structured surface film 18 so that the majority of the light available to the system is eventually emitted in the narrower output wedge.

FIGURE 4 shows a typical brightness enhancing film of the prior art, designated generally as 40. Brightness enhancing film 40 has a smooth surface 42 and a structured surface 44. Structured surface 44 includes a plurality of linear prisms such as prism 46. Each prism on structured surface 44 has a peak such as peak 48. Each peak such as peak 48 has associated therewith a peak angle such as peak angle 50. Preferably, the peak angles such as peak angle 50 are 90°, although deviation from 90° is possible. Furthermore, it is known that the peaks such as peak 48 may be curved in cross section rather than sharply pointed. Using a curved or rounded peak, however, will reduce the gain of the brightness enhancing film. Generally, however, according to the prior art, the peaks such as peak 48 have been straight lines that individually maintained an essentially uniform distance from surface 42. In some prior art embodiments, surface 42 is not planar but has a structure thereon. In such cases, there is a plane that is generally associated with surface 42 and peak line 48 runs at a constant distance from the plane associated with surface 42.

Figure 5 shows an optical film 60 according to the present invention. Optical film 60 a structured surface 64 and an opposing surface 62. Opposing surface 62 could be optically smooth or could be relatively smooth but provided with a matte surface or other surface diffuser. Alternatively, various structures could also be formed on opposing surface 62.

Structured surface 64 has a plurality of structures such as structure 66. For a brightness enhancing film structure 66 acts effectively like the prisms of Figure 4 but the peak does not form a straight line as do the peaks of the structures of Figure 4. Instead the heights of the peaks of the prisms of the film shown in Figure 5 vary continuously along their lengths. Similarly the depths of the valleys between the peaks vary continuously. Alternatively stated, the distances from the peak lines and/or the valley lines of the structures on structured surface 64, or simply from the structures themselves, to the plane associated with opposing surface 62 are continuously varying. In general, the actual heights of the structures, or the distances from the structures to the plane associated with opposing surface 62, vary between 2% and 12% and more preferably between 4% and 8% of the nominal or average height of the structures. The nominal or average period of the variations preferably should be between four and forty times the height of the structures. More preferably, the nominal period of the variations should be between five and sixteen times the nominal height of the structures. Preferably, the actual height varies by an amount and with a nominal period sufficient to substantially mask the small cosmetic defects typically encountered in the manufacturing process. Preferably, the actual height varies by an amount and with a nominal period sufficient to substantially mask cosmetic point or spot defects having maximum dimensions equal to or less than eight times or more preferably equal to or less than ten times the nominal height of the structures and most scratch defects.

This variation in the heights of the prisms causes several unexpected results. First films according to the invention do not look like high performance, transparent, optical films. Instead they have a deceptive, almost hazy, appearance that masks some of the small defects in the prism sheets discussed above. This can considerably improve the yield of the manufacturing process. Second, it reduces the area where the structured surface of a prism sheet can contact the smooth surface of an adjacent sheet, thus reducing the area where

optical coupling can occur. This significantly improves the visual quality of the assembled display. Films of the invention will also help to eliminate or hide moiré patterns resulting from interference between the prisms and the pixel pattern of the LCD. The most surprising result, however, is that a brightness enhancing film according to the invention
5 accomplishes all of this while still providing essentially the same gain as a prior art film of the same material and having the same prism spacing or pitch.

Brightness enhancing films according to the invention could be of any substantially transparent material. A bulk diffusing material could be incorporated in a film according to the invention, although in many cases this will degrade the performance of the optical film.
10 Unitary, extruded films of acrylics and polycarbonates work well. Alternatively, the film could be a two part construction in which the structured surface according to the invention is cast and cured on a substrate. For example, ultraviolet-cured acrylics cast on polyester substrates may be used. Films of polyethylene terephthalate ("PET") have been shown to work well as substrates on which structures of the invention may be cured. Biaxially
15 oriented PET is often preferred for its mechanical and optical properties. A smooth polyester film that may be used as a substrate is commercially available from ICI Americas Inc. Hopewell, Virginia under the tradename Melinex™ 617. A matte finish coating that may be applied on a film to be used as a substrate is commercially available from Tekra Corporation of New Berlin, Wisconsin under the tradename Marnot™ 75 GU. Other films
20 could be used as well. These films could be chosen for their optical, mechanical, or other properties. For example, a substrate could be a multi-layer optical film as described in published PCT patent application WO-97/01774 the teaching of which is incorporated herein by reference. Examples of other films that could be used are wavelength selective
25 multi-layer optical films and reflective polarizers. Reflective polarizers could be multi-layer films, cholesteric materials, or materials of the type disclosed in published PCT patent application WO-97/32227 the teaching of which is incorporated herein by reference.

For brightness enhancing films according to the invention, the included angles of the structures of structured surface may be any angle in the range of 70° to 110° and more preferably in the range of 80° to 100°. Most preferably an angle of 90° is used to provide
30 the highest gain. If a lower gain with a softer transition at the boundary of the output wedge is desired, the peaks or valleys or both of the structures could be rounded. It is even

possible to use a continuously varying contour, such as a sinusoidal structure, although the gain will be significantly reduced. In another embodiment the structures do not need to be symmetric. For example they could be canted as shown in published PCT patent application WO-97/28468, the disclosure of which is incorporated herein by reference.

5 The pitch of the structures of a brightness enhancing film according to the invention is preferably between 10 μm and 100 μm and more preferably between 24 μm and 50 μm . A pitch of 50 μm has been found to work quite well. The preferred pitch will depend, in part, on the pixel pitch of the liquid crystal display. The prism pitch should be chosen to help minimize moiré interference.

10 Figures 6 and 7 are images of optical films according to the invention produced by a scanning electron microscope. Both of the films shown have prismatic structures with 90° included angles. The pitch of the prisms in each film is 50 μm . Reference numerals 68 and 68' indicate prism peaks and reference numerals 69 and 69' indicate prism valleys. The variation of the peaks and valleys of the prisms may be clearly seen in these images.

15 Masters for the tools used for manufacturing brightness enhancing films, whether by extrusion or by a cast and cure process, may be made by known diamond turning techniques. Typically the tools are made by diamond turning on a cylindrical blank known as a roll. The surface of the roll is typically of hard copper, although other materials may be used. The prism structures are formed in continuous patterns around the circumference
20 of the roll. In a preferred embodiment the grooves are produced by a technique known as thread cutting. In thread cutting, a single, continuous groove is cut on the roll while the diamond tool is moved in a direction transverse to the turning roll. If the structures to be produced have a constant pitch, the tool will move at a constant velocity. A typical diamond turning machine will provide independent control of the depth that the tool
25 penetrates the roll, the horizontal and vertical angles that the tool makes to the roll and the transverse velocity of the tool.

 Figure 8 shows an alternative embodiment of the invention in which the structures have rounded peaks and valleys rather than the sharp peaks and valleys shown in Figure 5. In another alternative embodiment, the variation in the structures may have sharp
30 discontinuities rather than be smoothly varying as shown in Figures 5 and 8.

In order to produce the structures of the invention a fast tool servo actuator is added to the diamond turning apparatus. A fast tool servo actuator, designated generally as 70, is shown in Figure 9. A diamond tool, 72, extends from a case including walls 74 and back 76. Diamond tool 72 is supported by a piezoelectric stack 78. When
5 piezoelectric stack 72 is stimulated by a varying electrical signal, it will cause diamond tool 72 to be moved such that the distance that it extends from the case changes. It is possible for the piezoelectric stack to be stimulated by a signal of constant or programmed frequency, but it is generally preferable to use a random or pseudo random frequency. As used herein, the term random will be understood to include pseudo random. The tool so
10 produced may then be used in standard extrusion or cast and cure processes to produce an optical film.

In a test of the present invention a brightness enhancing film having a pitch of 50 μm and sharp prism peaks and valleys, all having included angles of 90° , was made. The fast tool servo actuator was set to allow the diamond tool to move in the depth of cut direction with
15 an amplitude of 2 μm . Since the height of a right angle prism is half of its width, this made the variation equal to about 8% of the nominal height of the structure. The fast tool servo actuator was stimulated with white noise filtered by a band pass filter that transmitted 4KHz to 5.6KHz. The diamond turning machine was set so that the roll would turn at a speed such that its surface would have a velocity of approximately 0.8 m per second and a brightness enhancing pattern
20 was thread cut on the roll. This produced a structured surface pattern with a variation according to the invention having a nominal period of approximately 145 μm . This pattern was a continuous groove on the roll with a nominal depth corresponding to the nominal height of the structure on the film to be manufactured. The result was a brightness enhancing film having essentially the same gain as one without the structure produced with the fast tool servo actuator,
25 but with significantly fewer observable defects.

Figure 10 is a side view of an optical film, 80, according to the invention. Film 80 includes a substrate 82 and a structured surface portion 84. The prism peak, 86, varies in height along its length. The prism valley, indicated by hidden line 88, has a similar variation.

Figure 11 shows a display, 90, using a light redirecting film according to the invention.
30 Light from lighting element 92 is directed by reflector 94 into light guide 96. Lighting element 92 is typically a fluorescent tube, although other lighting elements could be used. As shown,

light guide 96 is a wedge, but other shapes such as pseudo wedges could be used. Light guide 96 could be transparent or could include a bulk diffuser. Light emerging from light guide 96 at a low or grazing angle will enter light redirecting film 98. Light redirecting film 98 has a structured surface side 100. Structured surface side 100 has a plurality of linear prisms such as linear prism 102. Linear prism 102 has a first side 104 and a second side 106. Light from light guide 96 will enter light redirecting film 98 through the first sides of the linear prisms such as first side 104 and be totally internally reflected by second side 104 and emerge from light redirecting film 98 through opposing surface 106. The light will then pass through a light gating device 108. Light gating device 108 is typically a liquid crystal.

As with a brightness enhancing film, light redirecting film 98 could be extruded or cast and cured on a substrate. The shape and size of prisms such as prism 102 will be dictated by the design of light guide 96 and the nature of light gating device 108. Typically, light emerging from light redirecting film 96 should be traveling in a direction normal to the surfaces of light gating device 108. Generally, this will require that the sides of the linear prisms, such as sides 104 and 108, are substantially flat. However, if a greater angular spread of light output is desired, the sides of the prisms may be curved in cross section. The linear prisms, such as prisms 102 may be symmetric or asymmetric. In general in symmetric designs the prisms for a light redirecting film will have peak angles in the range of 60° to 72° and asymmetric designs will have smaller peak angles. The exact design, however, will always depend on the backlight and desired result.

Claims

What is claimed is:

1. An optical film comprising a structured surface and an opposing surface, said structured surface having a plurality of structures thereon, each of the structures having a nominal height and an actual height, said actual heights of at least some of said structures varying along the length of said structures, said variations having a nominal period of less than forty times said nominal height.
2. The optical film of Claim 1 wherein said nominal period is between four and forty times said nominal height.
3. The optical film of Claim 1 wherein said nominal period is between five and sixteen times said nominal height.
4. The optical film of Claim 1 wherein said structures are linear prisms.
5. The optical film of Claim 4 wherein said prisms have included angles in the range of 70° to 110°.
6. The optical film of Claim 5 wherein said prisms are symmetric.
7. The optical film of Claim 6 wherein said nominal period is between four and forty times said nominal height.
8. The optical film of Claim 4 wherein said prisms have included angles in the range of 60° to 72°.
9. The optical film of Claim 8 wherein said nominal period is between four and forty times said nominal height.
10. The optical film of Claim 1 wherein said actual heights of at least some of said structures vary along the length of said structures by an amount between 2% and 12% of said nominal height.
11. The optical film of Claim 10 wherein said nominal period is between four and forty times said nominal height.
12. The optical film of Claim 10 wherein said actual heights of at least some of said structures vary along the length of said structures by an amount between 4% and 8% of said nominal height.
13. The optical film of Claim 1 wherein said opposing surface is a matte surface.

14. An optical film comprising a structured surface and an opposing surface, said structured surface having a plurality of structures thereon, said structures having a nominal height and an actual height, said actual heights of at least some of said structures having a random variation of at least 2% of said nominal height.

5 15. An optical film comprising a structured surface and an opposing surface, said structured surface having a plurality of structures thereon, said structures having a nominal height and an actual height, said actual height of at least some of said structures varying by an amount and with a nominal period sufficient to substantially mask small cosmetic defects in said optical film.

10 16. The optical film according to Claim 15 wherein said actual height of at least some of said structures varies by an amount and with a nominal period sufficient to substantially mask cosmetic defects having maximum dimensions equal to or less than eight times said nominal height of said structures.

15 17. An optical film comprising a structured surface and an opposing surface said opposing surface having a plane associated therewith, said structured surface having a plurality of structures thereon said structures having a nominal height, said structures varying in distance from said plane with a nominal period of less than forty times said nominal height.

18. An optical film comprising a structured surface and an opposing surface said opposing surface having a plane associated therewith, said structured surface having a plurality of structures thereon, said structures lying a distance from said plane where said distance continuously varies with a varying period.

20 19. The optical film according to Claim 18 wherein said distance varies between a maximum and a minimum distance.

20. An optical film according to Claim 18 wherein said period varies randomly.

25 21. An optical film comprising a structured surface and an opposing surface, said opposing surface having a plane associated therewith, said structured surface having thereon a plurality of structures, said structures reflecting light entering said film through said opposing surface while making an angle in a first predetermined group of angles with a normal to said plane associated with said opposing surface and refracting light entering said optical film while making an angle in a second predetermined group of angles to said normal to said plane
30 associated with said opposing surface such that a majority of the light exiting said optical film through said structured surface will exit in an output wedge that is smaller than the input wedge

and said structures have a nominal height and an actual height, said actual height of at least some of said structures continuously varying with a nominal period of variation less than forty times said nominal height.

22. An optical film comprising a structured surface and an opposing surface, said
5 opposing surface having a plane associated therewith, said structured surface having
thereon a plurality of structures, said structures reflecting light entering said film through said
opposing surface while making an angle in a first predetermined group of angles with a normal
to said plane associated with said opposing surface and refracting light entering said optical film
while making an angle in a second predetermined group of angles to said normal to said plane
10 associated with said opposing surface such that a majority of the light exiting said optical film
through said structured surface will exit in an output wedge that is smaller than the input wedge
and said structures have a nominal height and an actual height, said structures having a nominal
height and an actual height, said actual height of at least some of said structures varying by an
amount and with a period sufficient to substantially mask cosmetic defects having maximum
15 dimensions equal to or less than eight times said nominal height in said optical film.

23. A display comprising:
an area source of light;

an optical film having a structured surface a light exit wedge associated therewith and an
opposing surface having a light entry wedge associated therewith said exit wedge being
20 narrower than said entry wedge, said opposing surface facing said area light source, and said
structured surface having structures thereon, said structures having an actual height and a
nominal height, said actual height of at least some of said structures continuously varying with a
nominal period of variation less than forty times said nominal height; and

a light gating device separated from said area source of light by said optical film.

24. A display according to Claim 23 further including an optical diffuser between said
25 structured surface material and said area light source.

25. A display according to Claim 23 wherein said light gating device includes a liquid crystal
device.

26. A display according to Claim 23 further including a reflector on a side of said area
30 source of light opposite said structured surface material.

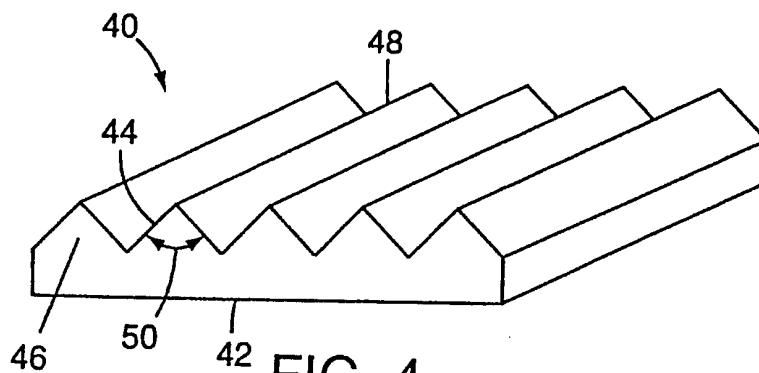


FIG. 4

Prior Art

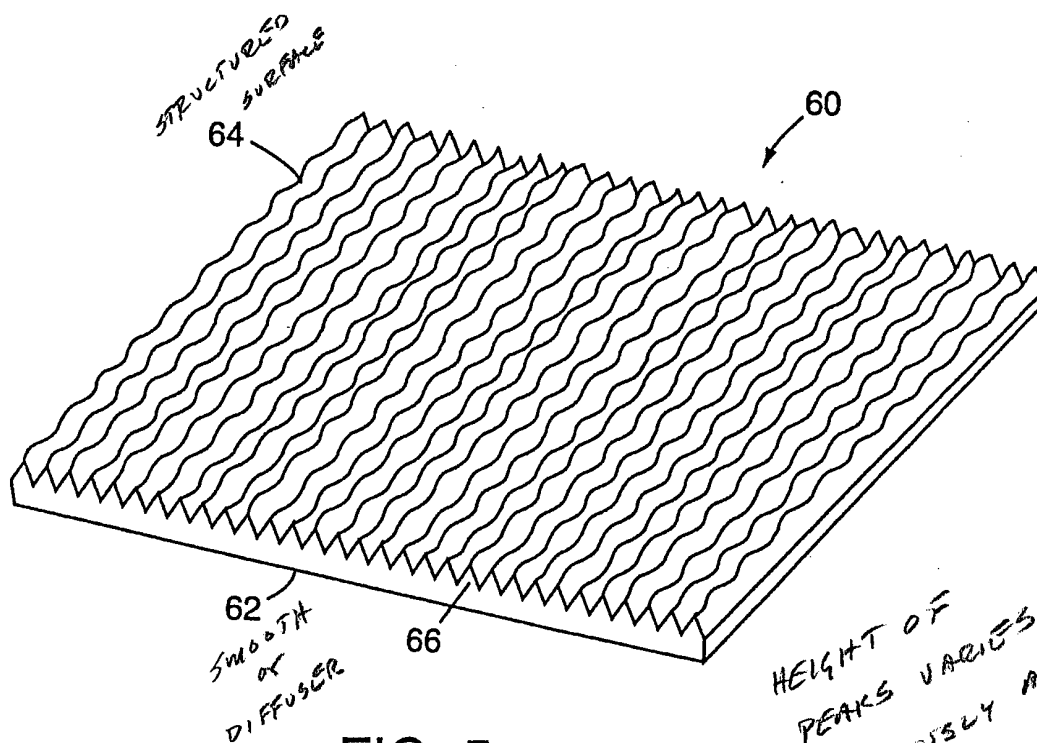


FIG. 5

HEIGHT OF
PEAKS VARIES
CONTINUOUSLY ALONG
ITS LENGTH

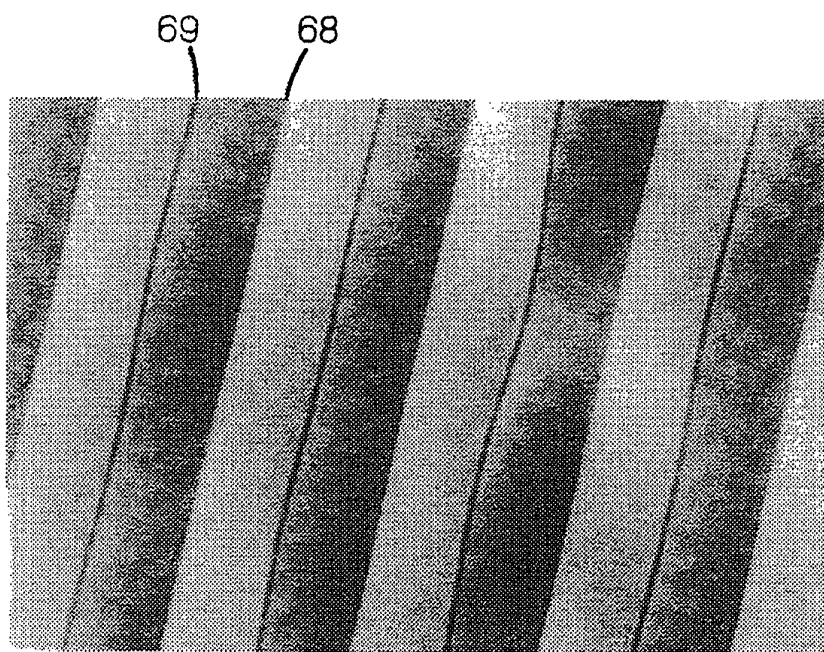


FIG. 6

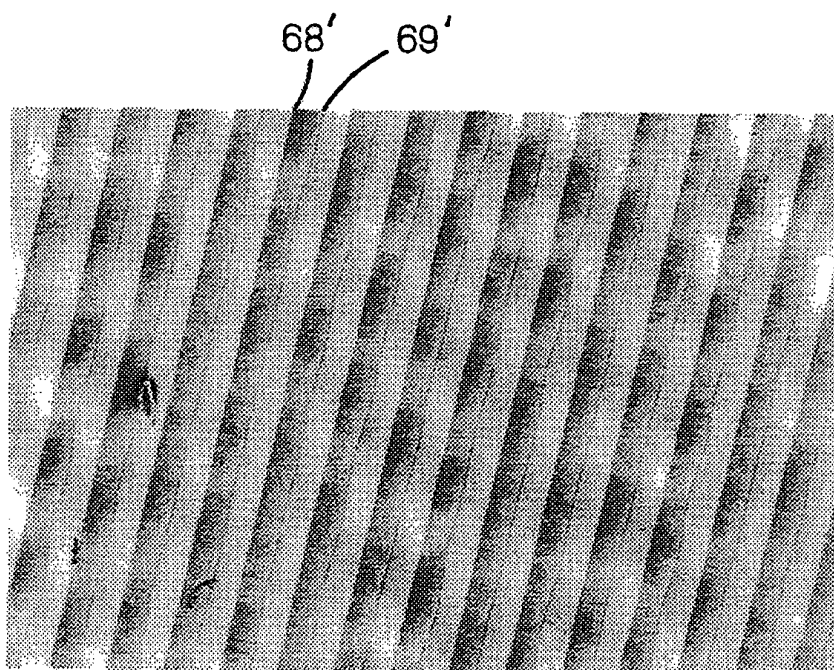


FIG. 7

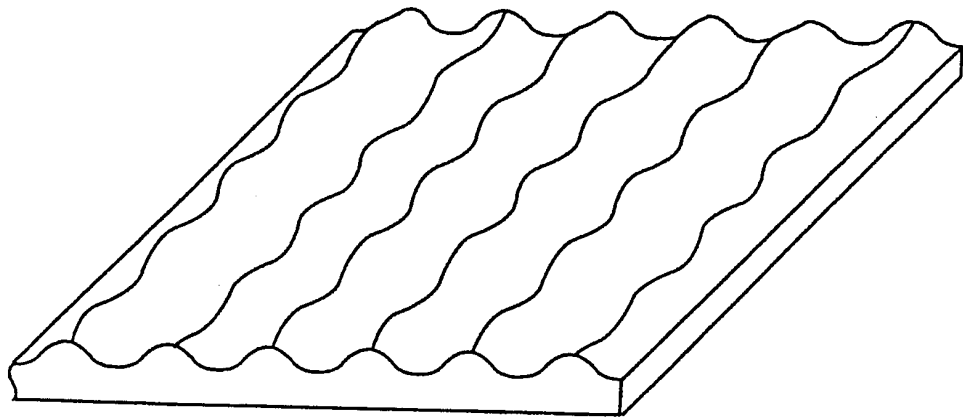


FIG. 8

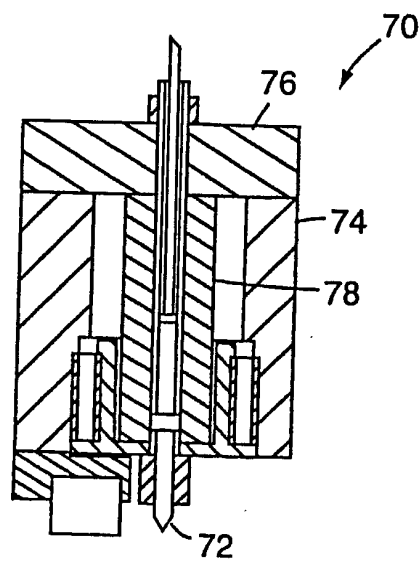


FIG. 9

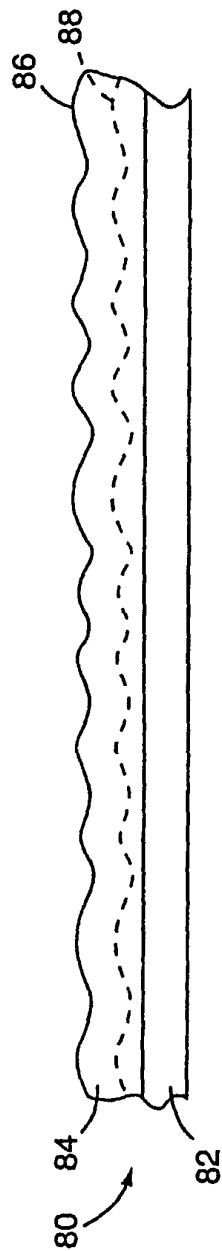


FIG. 10

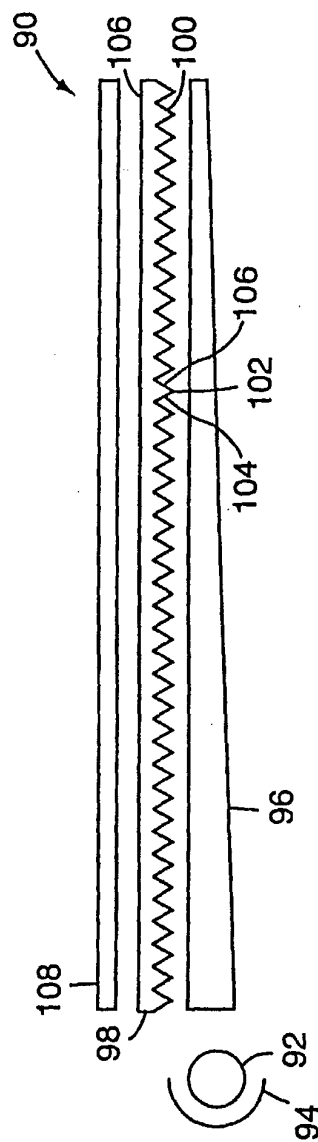


FIG. 11

INTERNATIONAL SEARCH REPORT

national Application No
PCT/US 99/01305

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 G02B5/04 F21V5/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 G02B F21V G02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 005 108 A (PRISTASH DAVID J ET AL) 2 April 1991 see column 4, line 23 - column 5, line 33; figures 4-6 ---	1-29
A	WO 96 27757 A (MINNESOTA MINING & MFG) 12 September 1996 see page 4, line 21 - page 10, line 23; figures 1-8 ---	1-29
A	WO 97 28468 A (MINNESOTA MINING & MFG) 7 August 1997 cited in the application see page 3, line 1 - page 9, line 23; figures 1-23 --- -/--	1-29

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

19 May 1999

Date of mailing of the international search report

26/05/1999

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

THEOPISTOU, P

INTERNATIONAL SEARCH REPORT

I. national Application No
PCT/US 99/01305

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 531 939 A (ENPLAS CORP) 17 March 1993 see column 6, line 35 - column 9, line 6; figures 5-16 ---	1-29
A	US 4 984 144 A (COBB JR SANFORD ET AL) 8 January 1991 cited in the application see column 1, line 67 - column 3, line 10; figures 1-4 ---	1-29
A	US 5 076 668 A (DALISA ANDREW L ET AL) 31 December 1991 see column 9, line 34 - column 10, line 68; figures 5-7 -----	1-29

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/01305

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5005108 A	02-04-1991	US 5136480 A	04-08-1992
WO 9627757 A	12-09-1996	AU 694619 B	23-07-1998
		AU 4900896 A	23-09-1996
		CA 2212223 A	12-09-1996
		EP 0813667 A	29-12-1997
		JP 11501149 T	26-01-1999
		US 5771328 A	23-06-1998
WO 9728468 A	07-08-1997	AU 1852397 A	22-08-1997
		CA 2242424 A	07-08-1997
		EP 0879430 A	25-11-1998
EP 0531939 A	17-03-1993	US 5655827 A	12-08-1997
		US 5769522 A	23-06-1998
		US 5414599 A	09-05-1995
US 4984144 A	08-01-1991	AU 613032 B	25-07-1991
		AU 1562788 A	10-11-1988
		AU 7735591 A	15-08-1991
		CA 1316159 A	13-04-1993
		DE 3850705 D	25-08-1994
		DE 3850705 T	02-02-1995
		EP 0292159 A	23-11-1988
		ES 2056106 T	01-10-1994
		JP 2693173 B	24-12-1997
		JP 63298902 A	06-12-1988
		KR 125438 B	26-12-1997
		MX 167540 B	29-03-1993
US 5076668 A	31-12-1991	US 4991940 A	12-02-1991
		CA 1302545 A	02-06-1992
		DE 68916658 D	18-08-1994
		DE 68916658 T	10-11-1994
		EP 0326248 A	02-08-1989
		JP 2003011 A	08-01-1990
		JP 2857159 B	10-02-1999